





MULTI LED M

plastic, aluminium

11357




Możliwość wyboru temperatury barwowej (K) oraz mocy (W)
 Selectable colour temperature (K) and wattage (W)
 Возможность выбора цветовой температуры (K) и мощности (W)

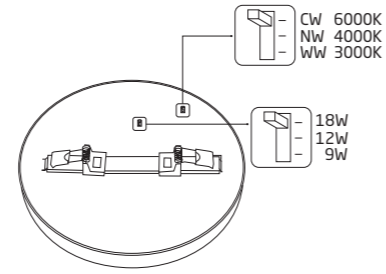


MULTI LED L

plastic, aluminium

11358

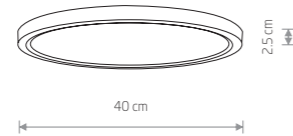


Możliwość wyboru temperatury barwowej (K) oraz mocy (W)
 Selectable colour temperature (K) and wattage (W)
 Возможность выбора цветовой температуры (K) и мощности (W)


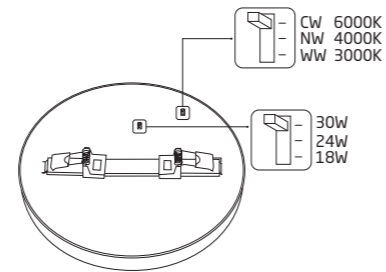


Sposoby montażu / Installation methods / Методы монтажа

1. Natynkowy
1. Surface-mounted
1. Поверхностный монтаж

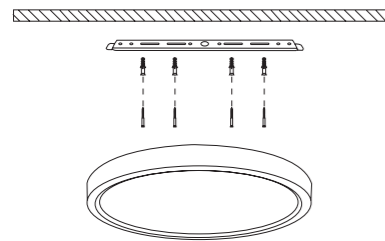


2. Podtynkowy
2. Flush-mounted
2. Врезной монтаж

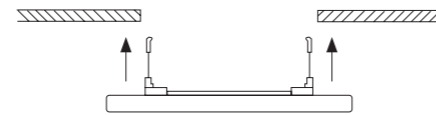

cut out min. 65 mm




cut out max. 180 mm



min. 65 mm - max. 180 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11357	9W / 12W / 18W LED	CCT CHANGE 3000-6000K	900 / 1200 / 1600 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h
11358	18W / 24W / 30W LED	CCT CHANGE 3000-6000K	1800 / 2400 / 2900 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h

□ WHITE

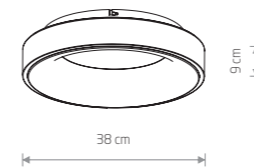


NIKKI ROUND LED

painted steel, plastic PMMA

11200 3000K 11203 4000K

11206 3000K 11210 4000K

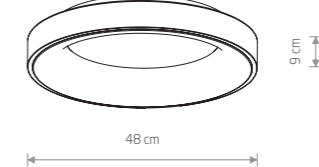


NIKKI ROUND LED

painted steel, plastic PMMA

11201 3000K 11204 4000K

11207 3000K 11211 4000K

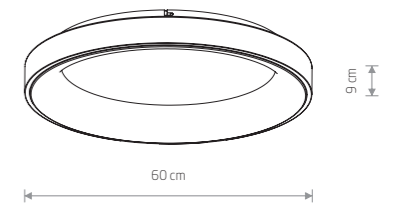

NIKKI ROUND LED

painted steel, plastic PMMA

11202 3000K 11205 4000K

11208 3000K 11212 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
11200	32W LED	3000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11201	48W LED	3000K	4200 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11202	60W LED	3000K	5400 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11203	32W LED	4000K	2800 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11204	48W LED	4000K	4300 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11205	60W LED	4000K	5600 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11206	32W LED	3000K	2600 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11207	48W LED	3000K	4000 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11208	60W LED	3000K	5200 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11210	32W LED	4000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11211	48W LED	4000K	4200 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h
11212	60W LED	4000K	5400 lm	120°	>80	~220-230 V, 50/60 Hz	□	IP20	40000h

□ WHITE ■ BLACK